



Avery Dennison® Automotive Window Films

High-Performance Films

Introducing AWF High-Performance Films - part of the Avery Dennison Automotive Window Film range. These three separate film ranges provide the glare protection and extra vehicle safety you need for any automotive application. As metalized films, they provide superior solar performance (vs non-reflective films).

EASY TO APPLY

Avery Dennison® AWF HP Pro is a premium high-performance, metal-dye hybrid film range with outstanding shrinkage performance, quick drying time and ease of handling. With a sleek non-fading charcoal colour, it protects against heat, glare and harmful UV radiation. The 38 micron film is optimized with metallized polyester and colour-stable dye to ensure low exterior reflection - with 5%, 15%, 25% and 35% visible light transmission options. It offers 5-year warranty.

FEATURES

- > Superior aesthetics - cool, no-fade charcoal colour
- > Broad range of light transmission levels
- > Ranges with excellent solar, installation and safety performance
- > Premium heat block
- > Up to 94% glare reduction
- > 99% UV block

BENEFITS

- > Keeps cars cool, comfortable and UV-screened
- > Enhances style of vehicle and privacy
- > Range of VLTs to suit the tinting customization
- > Stays looking good over time
- > Film options for the best cost, solar and safety performance

APPLICATION AREAS

Glass substrates:

- > Private vehicles
- > Commercial fleet vehicles






Product table specification and VLT level (example below)

| High Performance | AWF HP Pro 05 | | | AWF HP Pro 15 | | | AWF HP Pro 25 | | | AWF HP Pro 35 | | |
|---|----------------------|----|----|---------------|----|----|---------------|----|----|----------------------|----|----|
| Widths offered (inches)* <small>(standard roll length 31m)</small> | 60 | 30 | 20 | 60 | 30 | 20 | 60 | 30 | 20 | 60 | 30 | 20 |
| Visible light transmitted % | 5 Highest privacy | | | 15 | | | 25 | | | 37 Subtle privacy | | |
| UV block % | > 99 | | | > 99 | | | > 99 | | | > 99 | | |
| Total solar energy rejected % | 64 | | | 53 | | | 50 | | | 45 | | |

*We offer common EU sizes (60" =1.524m/ 30"=0.762m/ 20"= 0.508m)

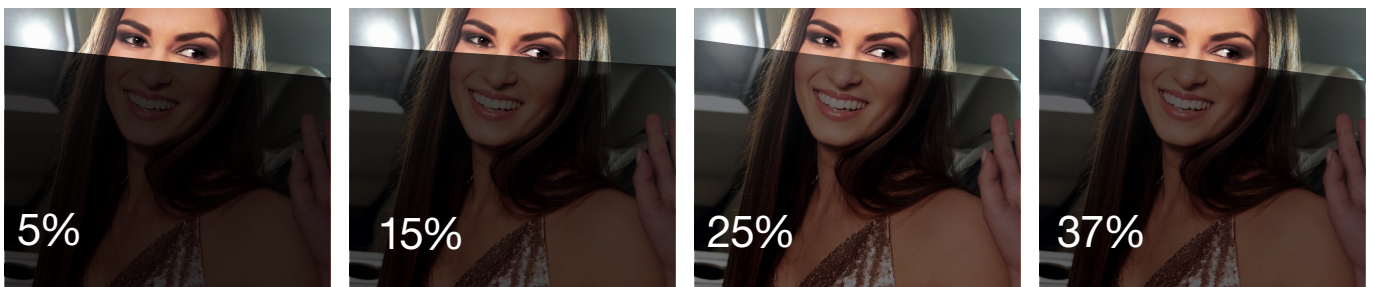


COST-EFFECTIVE SOLAR

Avery Dennison® AWF HP is a cost effective and high-performance, metal-dye hybrid film range, which combines a metallized film with a weatherable dyed polyester for optimized solar performance. These films offer low reflection and a visually appealing, stable graphite colour stability - in 5%, 15%, 25% and 35% visible light transmission options. Thickness is 30 microns - with good dot matrix compatibility and 4 years warranty.

| High Performance | AWF HP 05 | | | AWF HP 15 | | | AWF HP 30 | | | AWF HP 40 | | |
|---|----------------------|----|----|-----------|----|----|-----------|----|----|----------------------|----|----|
| Widths offered (inches)* <small>(standard roll length 31m)</small> | 60 | 30 | 20 | 60 | 30 | 20 | 60 | 30 | 20 | 60 | 30 | 20 |
| Visible light transmitted % | 6 Highest privacy | | | 14 | | | 30 | | | 38 Subtle privacy | | |
| UV block % | > 99 | | | > 99 | | | > 99 | | | > 99 | | |
| Total solar energy rejected % | 62 | | | 55 | | | 50 | | | 46 | | |

*We offer common EU sizes (60" =1.524m/ 30"=0.762m/ 20"= 0.508m)

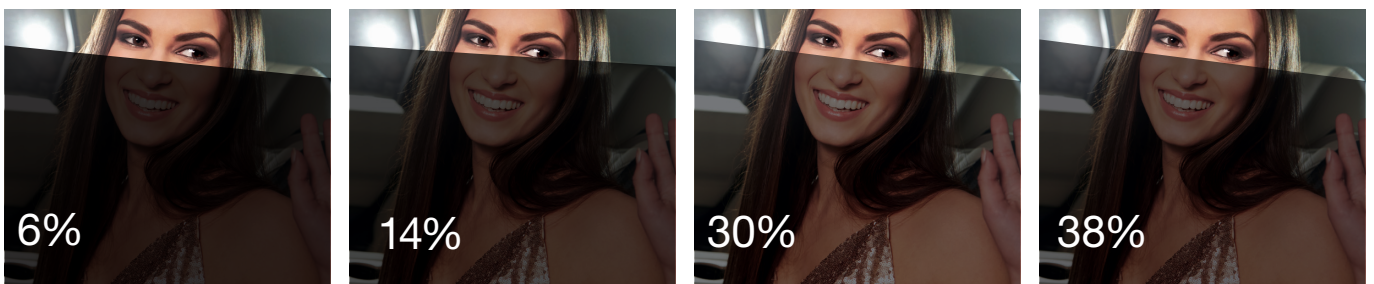




EXTRA-SAFE

Avery Dennison® AWF HP Safety is a high-performance, hybrid safety film range with different light transmission options. It combines an outstanding solar control film with a safety laminate that keeps shattered glass in place. A high clarity adhesive ensures no smears or smudging, with outstanding clarity and colour stability. 101 micron thickness and 5-year warranty.

| High Performance | AWF HP Safety 05 | | | AWF HP Safety 15 | | | AWF HP Safety 30 | | | AWF HP Safety 40 | | |
|--|----------------------|----|----|------------------|----|----|------------------|----|----|----------------------|----|----|
| Widths offered (inches)* <small>(standard roll length 31 m)</small> | 60 | 30 | 20 | 60 | 30 | 20 | 60 | 30 | 20 | 60 | 30 | 20 |
| Visible light transmitted % | 6 Highest privacy | | | 14 | | | 30 | | | 38 Subtle privacy | | |
| UV block % | > 99 | | | > 99 | | | > 99 | | | > 99 | | |
| Total solar energy rejected % | 62 | | | 55 | | | 50 | | | 46 | | |

*We offer common EU sizes (60" =1.524m/ 30"=0.762m/ 20"= 0.508m)

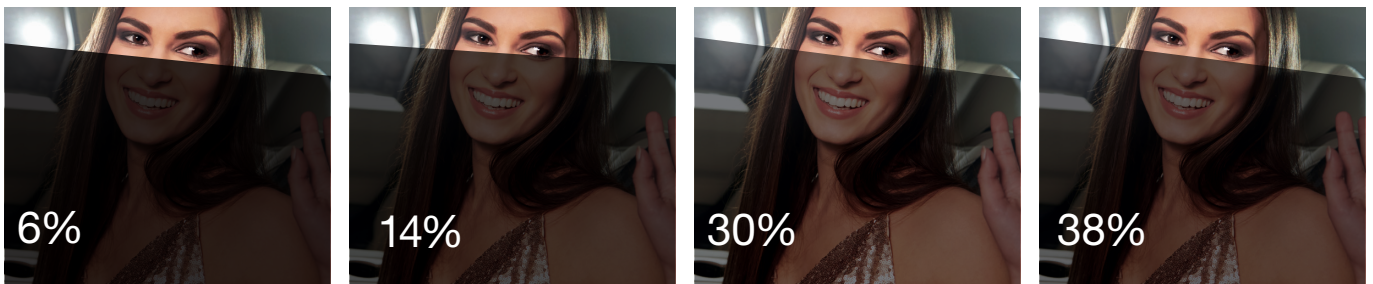

DISCLAIMER - All Avery Dennison statements, technical information and recommendations are based on tests believed to be reliable but do not constitute a guarantee or warranty. All Avery Dennison products are sold with the understanding that purchaser has independently determined the suitability of such products for its purposes. All Avery Dennison's products are sold subject to Avery Dennison's general terms and conditions of sale, see <http://terms.europe.averydennison.com>

©2018 Avery Dennison Corporation. All rights reserved. Avery Dennison and all other Avery Dennison brands, this publication, its content, product names and codes are owned by Avery Dennison Corporation. All other brands and product names are trademarks of their respective owners. This publication must not be used, copied or reproduced in whole or in part for any purposes other than marketing by Avery Dennison.

2019-04_18086EN



Inspired Brands.
Intelligent World.™

graphics.averydennison.eu/awf